

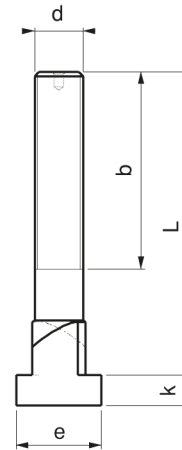


Referans Nr.	dx  x L	b	a	e	k	Sıkma Verileri Tightening Data		
						Nm	kN	
1650-1214050	x50	35						70
1650-1214080	M12x14 x80	55	13.7	22	8	141	74	100
1650-1214125	x125	75						120
1650-1618063	x63	45						160
1650-1618100	M16x18 x100	65	17.7	28	10	354	138	220
1650-1618160	x160	100						280
1650-2022080	x80	55						330
1650-2022125	M20x22 x125	85	21.7	35	14	679	215	430
1650-2022200	x200	120						570
1650-2428100	x100	70						650
1650-2428125	M24x28 x125	85	27.7	44	18	1163	310	770
1650-2428250	x250	150						1150




### Ürün Nr. 1650 Dereceli T-Ayaklı Saplama

- T-Kanal pleytlerde üstten T-Kanala girip bağlama özelliği vardır
- Kalite 12.9
- Siyah kaplama

### Product Nr. 1650 Graded T-Slot Bolt

- In T-Slot plates it has the feature of making the coupling by entering T-Slot the top.
- Quality 12.9
- Black coating



**Not:** 150 °C üzerindeki ortamlarda sıkma işlemi yapılırken dişlerin üzerine Loctite 8150 kullanılır.



Loctite  
8150

**Note:** Environments on the 150 °C when clamping action on the thread Loctite 8150 is used.